

www.geo-drilling.com

gds

made in the USA

The Water-Propelled Down-The-Hole Hammer

WAI 50i

- Excellent drilling speed
- Long lifetime
- Extraordinary drilling stability, small drilling deviations
- Environmentally friendly, operation only with water (no oil etc.)
- Significant reduction of energy consumption
- No dust formation, therefore preferred use in tunnel construction or in urban areas
- Different drill bit design available, adapted to the geological conditions
- Fast availability of hammers and spare parts
- Low spare part costs
- Technical support



www.tunnel-drilling.com

tds ®

www.geo-drilling.com

www.tunnel-drilling.com

gds



made in the USA

The Water-Propelled Down-The-Hole Hammer


WAI 50i

Technical data

- Standard drilling bit Ø 130 mm - 152 mm
- Working pressure: 60 - 180 bar (950 - 2650 psi)
- Required amount of water (hammer new): 180 - 300 l/min
- Required amount of water (hammer used): 280 - 450 l/min
- Impact frequency: up to 3300 impacts/min
- Feed force (formation-related): 11000 - 25000 N
- Rotation speed: 45 - 75 rpm
- Torque (formation-related): 1500 - 3000 Nm

Dimensions


- Length: 1615 mm
- Diameter: 127 mm (5")
- Weight: 111 kg

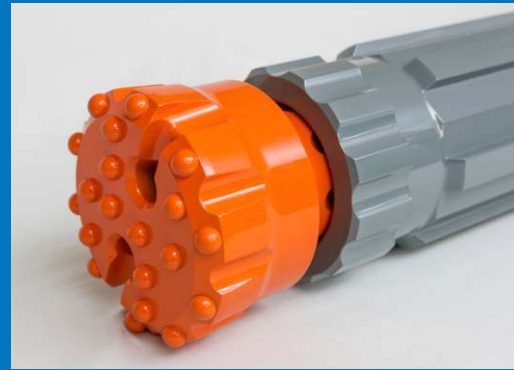

Contact

Stenhuggarvägen 7B
SE-132 38 Saltsjö-Boo
Sweden

tel: +46 (0) 70 887 5004
robert.hansson@geo-drilling.com

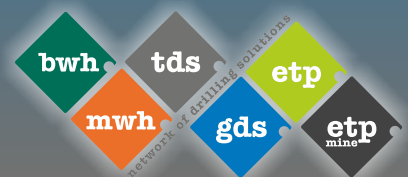

gds geo drilling solutions ab

